



Commissioner for Patents
Washington, DC 20231
www.uspto.gov

APPLICATION NUMBER	FILING DATE	GRP ART UNIT	FIL FEE REC'D	ATTY. DOCKET NO	DRAWINGS	TOT CLAIMS	IND CLAIMS
10/310,955	12/06/2002	2852	870	016907-1458	7	10	2

22428
FOLEY AND LARDNER
SUITE 500
3000 K STREET NW
WASHINGTON, DC 20007

CONFIRMATION NO. 7013

UPDATED FILING RECEIPT



OC000000009918054

Date Mailed: 04/28/2003

Receipt is acknowledged of this regular Patent Application. It will be considered in its order and you will be notified as to the results of the examination. Be sure to provide the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION when inquiring about this application. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. If an error is noted on this Filing Receipt, please write to the Office of Initial Patent Examination's Filing Receipt Corrections, facsimile number 703-746-9195. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections (if appropriate).

Applicant(s)

Yuusuke Suzuki, Mishima-shi, JAPAN;

Assignment For: Published Patent Application

TOSHIBA TEC KABUSHIKI KAISHA;

Domestic Priority data as claimed by applicant

Foreign Applications

If Required, Foreign Filing License Granted: 02/03/2003

Projected Publication Date: 06/10/2004

Non-Publication Request: No

Early Publication Request: No

Title

Image forming apparatus performing image correction for object, and method thereof

TITLE OF THE INVENTION

IMAGE FORMING APPARATUS PERFORMING IMAGE CORRECTION FOR
OBJECT, AND METHOD THEREOF

BACKGROUND OF THE INVENTION

5 Connectionally known in the image formation of a
color printing system is a system for performing
processing for each kind of drawing object by effecting
a switching of color processing parameters of color-
conversion color lock-up tables (hereinafter referred
10 to as color conversion tables) and halftone cells on
a threshold table used at the tone processing time.
An expanded type of system is also proposed which, when
a drawing object is an image, decides the kind of image
with a command in a page description language (PDL)
15 and, by doing so, performs processing by effecting a
switching of color processing parameters.

 As the examples of the prior art, there are Jpn.
Pat. Appln. KOKAI Publication Nos. 2001-69360 and
2000-331147 and these disclose the technique for
20 deciding the attribute of the drawing object in the
color image processing method and performing color
processing based on the result of decision.

 When a human looks at an object, what is called a
color "area" effect works. The color "area" effect
25 means an effect by which the lightness and saturation
of an object look different due to its color-drawn
area. In the above-mentioned prior art technique,

color correction while giving consideration to such a color "area" effect is not made and it is, therefore, not possible to obtain any adequate printing result. Thus a problem is involved. Even in the switching of
5 halftone cells, such a switching is not effected in a way to give consideration to the relation of the halftones between the adjacent objects and, depending upon a combination of such halftones, there is a problem with which a printed thing looks unnatural
10 sometimes.

Further, the kind of image is not specified in a way to make adequate use of image information to be printed and color conversion and tone correction are not made in a way to be matched to the kind of image.
15 And any adequate color correction is not effected in a way to be matched to the kind of image, so that a problem is involved.

BRIEF SUMMARY OF THE INVENTION

The project of the present invention is to provide
20 an image forming apparatus and image forming method which can obtain an optimal printing result by effecting color conversion and color correction while giving adequate consideration to a color "area" effect and effecting color conversion and color correction in
25 a way to be matched to the kind of image decided by image information.

In one aspect of the present invention there is

provided an image forming apparatus comprising an
identifying section configured to analyze image
information and identify object information and detect
the size of the object information and concentration
5 difference between the object information and
background information; an image processing section
configured to, based on at least one of the size of the
object information detected by the identifying section
and the concentration difference relative to the
10 background information, perform image processing; and a
printer section configured to form an image on a
recording medium based on image information on which
the image processing is performed by the image
processing section.

15 The present invention provides the image forming
apparatus which, by giving consideration to the size of
the object information analyzed from image information
represented by a page description language and the
concentration difference of the object information
20 relative to the background, can cancel a color "area"
effect and make printing in a way to have a print
finishing felt natural to the human eye. That is, the
human eye involves the color "area" effect such that,
for a smaller area portion, the lightness is felt lower
25 in level and, for a higher lightness portion of the
background, the lightness of the object is felt
inadequate. By effecting the color correction in

accordance with these, it is possible to obtain print finishing natural to the human eye. That is, the lightness level of the object is increased when the size of the object information is below a given size and the lightness level of the object information is increased when the background of the object information and adjacent object information is higher in lightness level. As a result, it is possible to print an image felt natural to the human eye.

In another object of the present invention there is provided an image forming apparatus comprising an identifying section configured to analyze image information and identify object information and, in addition, detect character information from the image information; a deciding section configured to decide the attribute of the object represented by the object information by effecting comparison processing on the character information detected by the identifying section with the use of database; an image processing section configured to perform mage processing on the image information based on the attribute of the object represented by the object information decided by the deciding section; and a printer section configured to form an image on a recording medium based on the image information on which the image processing section is performed.

By detecting the character information in the

image information represented by the page description language (PDL) and performing searching processing on the character information, for example, with the use of an initially prepared database of an initially prepared database, it is possible according to the present invention to know the attribute of an object represented by the object information. That is, if a character string representing 「Mont Blanc」 is detected in the PDL and it is found to belong to the keyword representing a cake, then the attribute of the object represented by the object information can be decided as being a 「food」. By doing so, a color conversion table is selected so as to perform color conversion, for example, with a red system enhanced and corresponding halftone is selected to perform color conversion and tone processing. By doing so, printing processing is done with an optimal color correction made to the object information corresponding to the image represented by the 「food」.

20 BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

FIG. 1 is a block diagram showing one example of a structure of an image forming apparatus according to the present invention;

25 FIG. 2 is a block diagram showing one practical structure of an image processing section of an image forming apparatus according to the present invention;

FIG. 3 is a flow chart showing the processing of

an image processing section of an image forming apparatus according to a first embodiment of the present invention;

5 FIG. 4 is a flowchart showing the processing of an image processing section of an image forming apparatus according to a first embodiment of the present invention;

10 FIG. 5 shows an object processing order table for explaining the processing of an image processing section of the image forming apparatus according to the second embodiment according to the present invention;

15 FIG. 6 shows a table for explaining the determining of color processing parameters in the image processing section of the image forming apparatus according to the second embodiment of the present invention;

20 FIG. 7 shows a flow chart of the processing of an image processing section of an image forming apparatus according to a third embodiment of the present invention;

FIG. 8 shows a keyword table for explaining the processing of the image processing section of the image forming apparatus according to the third embodiment of the present invention; and

25 FIG. 9 shows a table for explaining the determining of a halftone and color conversion table in the image processing section of the image forming

apparatus according to the third embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

5 An image forming apparatus according to one embodiment of the present invention will be described below with reference to the accompanying drawing.

<Image Forming Apparatus According To The Present Invention>

10 FIG. 1 is a block diagram schematically showing a flow of signals in the electric connections and control of a digital color printer serving as an image forming apparatus according to the present invention. In FIG. 1, the digital color printer comprises a main control section 30, an operation panel 40, and a
15 printer section 2.

The operation panel 40 is connected to a main CPU 31 and comprises a panel CPU 41 for controlling a whole section, a liquid crystal display section 42, and operation keys 43 such as mode keys and ten keys.

20 The main control section 30 comprises the main CPU 31, a ROM 32, a RAM 33, an NVM 34, a common RAM 35, an image processing section 36, a page memory control section 37, a page memory 38, a printer controller 39, and a printer font ROM 121.

25 The main CPU 31 controls the whole of the main control section 30. The ROM 32 stores a control program and the RAM 33 temporarily stores data.

The NVM (endurance nonvolatile RAM) 34 is comprised of a nonvolatile memory backed up by a battery (not shown) and configured to retain data on the NVM 34 when a power supply is turned off.

5 The common RAM 35 is used to allow two-way communication to be done between the main CPU 31 and the printer CPU 110.

10 The page memory control section 37 allows image data to be stored into and read out of the page memory 38. The page memory 38 has an area for storing image data corresponding to a plurality of pages and allows image data, etc., which are supplied via an interface I/F 123 to be stored as compressed data on a per-page basis.

15 The printer font ROM 121 stores font data corresponding to print data and also stores various kinds of tables corresponding to FIGS. 6, 9 and 10 as will be described later.

20 The printer control 39 allows print data which comes from an external device 122, such as a personal computer, via the interface 31 to be expanded to image data with a resolution corresponding to data imparted to the print data, that is, to be so expanded with the use of font data stored into the printer font ROM 121.

25 The printer section 2 comprises the printer CPU 110 for controlling a whole section of the printer section 2, a ROM 111 for storing a control program,

etc., a RAM 112 for data storage, a laser driver 113
for turning the light emission of a semiconductor laser
on and off, a polygon motor driver 114 for controlling
the rotation of a polygon motor, a paper conveying
5 section 115 for controlling the conveyance of a sheet P
by a conveyance mechanism 20, a developing process
section 116 for effecting charging, developing and
transferring processes with the use of chargers 62y,
62m, 62c, 62k, developing rollers 64y, 64m, 64c, 62k,
10 and transfer units 93y, 93m, 93c, 93k, a fixing control
section 117 for controlling a fixing unit 80, and an
optimal section 118.

The image input interface section 123 is supplied
with a color image signal from the external device 122,
15 etc., and outputs it. The color image signal is
described by a page description language (PDL) and
carries a color image data.

Further, the image processing section 36, page
memory 38, printer controller 39, image correction
20 section 105 and laser driver 113 are connected by means
of image data bus 120.

FIG. 2 is an explanative view for mainly
explaining the operation of the image processing
section 36 of an image forming apparatus (digital color
25 printer) having the image processing section to which
the image processing according to the present invention
is applied.

The image processing section 36 comprises a color conversion section 202, an image area identifying section 203, a filtering processing section 204, a signal select section 205, an inking processing section 206, and a tone processing section 207.

The color conversion section 202 allows a color image signal which represents the RGB reflectivity to be converted to a color image signal representing the concentration of coloring materials (for example, YMC) to be recorded. The relation between the RGB reflectivity and YMC concentration provides a generally complex, non-linear relation. In order to realize this conversion processing, therefore, use is made of a three-dimensional table look-up method, a one-dimensional table look-up combined 3×3 matrix method, and so on.

The image area identifying section 203 identifies, from an inputted image area signal, its pixel attribute and outputs its result as an image area signal. Further, it detects later-described object information and size of the object information and performs comparison processing on a concentration difference of a background image and background's object information.

The filtering section 204 performs a plurality of filtering processing, such as sharpening and smoothing the YMC color image signal, in a parallel fashion. By

way of example, this section performs stronger edge-enhanced processing, weaker edge-enhanced processing and smoothing filtering processing in these three ways and outputs their results, so that these outputs are
5 selected at the signal select section 205. The filtering section 204 may receive an image area signal F and make a selective switching among a plurality of kinds of filtering processing themselves in accordance with the image area signal F. In this case, the signal
10 select section 205 is not necessary.

The inking processing section 206 converts the filtering-processed YMC color image signal to four-color (YMCK) signals. Though a black can be represented by placing three-color (YMC) coloring
15 materials in a registering way, four-color (YMCK) printing including a black coloring material is effected in an ordinary color printing because, in general, the black coloring material is lower in cost, higher in concentration, etc., then when the YMC colors
20 are registered.

The tone processing section 207 is used to represent an intermediate concentration and, as one example, it may be possible to generate a pulse signal of an amplitude corresponding to the concentration
25 signal and control a laser beam in an ON/OFF fashion in accordance with this signal.

Or by detecting character information from a PDL

and retrieving this on the database as shown in a
second embodiment it is possible to identify the
attribute of an object representing, for example, image
data of object information, determine corresponding
5 halftone information and color conversion table
information and, by effecting color correction, to
obtain an optimal printing result corresponding to the
attribute of the object information.

By referring to the drawing, an explanation will
10 be made below about thus structured image forming
apparatus according to first to third embodiments of
the present invention.

<First Embodiment>

The first embodiment of the present invention
15 provides an image forming apparatus configured to form
an image in accordance with a color "area" effect by
performing color correction according to the size of
object information in image information and a
concentration difference between the object information
20 and a background image. FIG. 3 is a flow chart showing
the processing of an image processing section of the
first embodiment on the image forming apparatus of the
present invention.

The first embodiment is characterized in that
25 color conversion tables and halftone cells are switched
based on the kind and size of an object involved. It
is further characterized by detecting a concentration

difference between the object information and its peripheral image and peripheral object and switching the color conversion tables and halftone cells. In the flow chart of FIG. 3, a PDL analysis is effected in
5 step S11 by receiving image information which is supplied from an outer personal computer, etc., through the interface 123. Here, the PDL analysis comprises interpreting a PDL command with respect to the PDL data inputted into the image processing section 36 according
10 to the present invention, replacing this by processing performed in the image processing section 36 according to the present invention, replacing this by processing performed in the image processing section 36 and converting the data in the PDL to a format handled in
15 the image processing section 36. In this processing, a drawing command and its parameter in the PDL data are referred to by a subsequent processing and converted to data of a format able to generate raster data and passed onto a subsequent stage of processing.

20 Further, as the operation of the image area identifying section 203, the object information is detected and determination is made on an adjacency relation between the detected object information and its periphery. That is, measurement is made on a
25 background image around the object information, a concentration difference relative to another adjacent object information and a distance between another

object information in the background and object
information as a target (S12). In this adjacent
relation, an evaluation for the concentration
difference may be done by setting one or more threshold
5 values and evaluating their large/small size or may be
done with the use of its own concentration difference.

Then the size of the object information is
detected and, in more detail, the drawing size of the
drawing object is calculated (S13) from a command
10 argument and drawing parameter in the PDL. In the
evaluation of this size also, it may be possible,
likewise, to evaluate one or more threshold values for
a size or to evaluate the size itself.

Further, determination is made on the kind of
15 object of object information detected and the kind of
object passed as a result of the PDL analyzing
processing is determined by the drawing command in the
PDL. By way of example, the kind of object to be
decided is classified into a text, an image and
20 graphics (S15). A value of a halftone cell on which
tone processing is done by the tone processing section
207 is decided (S16) based on at least one or all of
the adjacency relation between objects detected as the
operation of the image area identifying section 203,
25 the object size and the kind of object. Further,
determination is made (S17) on the value of the color
conversion table for performing color conversion

processing in the color conversion section 202.

That is, the halftone cell determination is made by reflecting the adjacency relation between the objects, the result of the object size and the result of the kind of object involved, or made based on at least one of these. By doing so, color correction is made with a color "area" effect by the human visual sense in view. No consideration is given to the case where the lightness of the background image is 20% and that of an object information is 30%. When, however, the lightness of the background image is 80% and that of the object information is 20%, if printing is made faithfully at the lightness of 20%, human perception will be made as a darker area whose lightness is, for example, below 10%. If, in this case, printing is made with the background lightness 20%, taken into consideration, for example, with the lightness 20% corrected to 40%, etc., it is possible to obtain a printed image of a natural feeling under a human visual sense.

Further, when an object is smaller by below a given extent even in terms of the object size, a color "area" effect emerges such that the lightness is felt to be lower in level. That is, when the lightness of, for example, 20% is demanded, if printing is made directly as the 20% lightness, it will be felt as a darker area of below 10% under a human visual sense.

Here, by effecting the color correction of object information of such a small area to a 40% lightness level it is possible to obtain a printed image of a natural feeling under a human visual sense.

5 In order to correct such a color "area" effect, the halftone cell and color conversion table are determined at steps S16 and S17. Here, the adjacency relation between objects, the result of the object size and the result of the kind of object are reflected or
10 the determination is made based on at least one of these. In the adjacency relation between the objects it is preferable that the value be determined taking into consideration a peripheral portion, another adjacent object information and a distance relative to
15 the background information.

 Finally, in the drawing processing stage, after color conversion is made in accordance with the determined halftone cell and result of the color conversion table and the tone processing is done, the
20 object is drawing-processed and printing raster data is prepared (S18).

 The prepared printing raster data is supplied to the printer section 2 and an image is formed on a recording medium as a printing image with the above-
25 mentioned color "area" effect taken into consideration.

<Second Embodiment>

A second embodiment according to the present

invention provides an image forming apparatus which shows the order of processing in the case of a plurality of object information being involved in the color correction on the first embodiment. FIG. 4 is a flow chart showing the image processing section of a second embodiment of an image forming apparatus according to the present invention. FIG. 5 shows an object processing table and FIG. 6 shows a table for explaining the determination of a color processing parameter.

In the second embodiment of the image forming apparatus according to the present invention, after in the flow chart of FIG. 4 a PDL analysis is made (S11) as in the same way as that of the first embodiment, the size of object information detected is found. The size is entered into the object processing order table as shown in FIG. 5. That is, the size of an object under an object number (1) is entered as 80 pixels into the object processing order table. Then, in the same way as in the first embodiment, determination is made on the adjacency relation of the detected object information and it is entered into the object processing order table. That is, no adjacent object is present under the object number (1), or the adjacent object under an object number (3) corresponds to an object number (4) and object number (5), or others. These processing are performed on all drawing

objects (S23).

And when these processing are done, the drawing order is determined in a size decreasing order, thus completing a table having a list of adjacent object
5 information (S24). In accordance with the specified order on the table, decision is made on the kind of object as in the same way as in the first embodiment (S15) and determination is made on the halftone cell (S16) and then on the color conversion table (S17).
10 Here, FIG. 6 shows a table of a kind of object under condition of selecting a color conversion table and halftone cell, an object size, an adjacent object and a corresponding relation between the correspondingly selected color conversion table and halftone cell. In
15 this way, it is possible to initially prepare a table showing a relation between the color conversion table and the halftone cell which are selected under a select condition and, in accordance with this, to perform select determining processing. Then, on the basis of
20 the thus select-determined color conversion table and halftone cell, drawing processing is done (S18) on a color-converted and tone-processed object and these processing are done on all drawing objects (S19).

In this way, in the second embodiment, the
25 halftone cells and color processing tables of the objects are determined in a size processing order of the objects. It is, therefore, possible to make

well-balanced color correction and to totally obtain a printed image surface of a natural feeling to which consideration is given to the color "area" effect specific to a human visual sense.

5 <Third Embodiment>

A third embodiment according to the present invention provides an image forming apparatus which can detect sentence information in a PDL, estimate the attribute of an image, based on this, represented by
10 object information, make image correction in accordance with the attribute and obtain a printed image in a way to make use of the attribute of the image. FIG. 7 is flow chart showing the processing in an image processing section of an image forming apparatus
15 according to the third embodiment of the present invention. FIG. 8 is a keyword table for explaining the processing in the third embodiment.

This third embodiment performs a PDF analysis (S31) as in the same way as shown in the flow char of
20 the first embodiment of FIG. 3 and decides the kind of object (S32). After this, if the kind of drawing object is present on a keyword table of FIG. 5 (S33), a search is made for a keyword (S34). That is, in the image area identifying section 203 where a keyword
25 search is made, a keyword registered on the keyword table as shown in FIG. 8 is searched in a targeted sentence information in the same page as that on which

an object is drawn with the use of initially prepared database, etc.

5 In more detail, this searching processing comprises detecting character information in a page description language (PDL) in step S34 and making a search for the character information by an initially prepared database for example (S35). By doing so it is possible to know the attribute of an object represented by the object information. That is, if a character
10 string containing 「Mont Blanc」 in the PDL is detected and this is understood as corresponding to a keyword called a cake through the search processing on the database, then the attribute of the object represented by the object information can be decided as being a
15 「food」 in step S36.

By doing so, as shown in FIG. 9 for example, with the use of a table containing a drawing parameter initially made to correspond to the kind and attribute, a color conversion table is selected (S17) so as to
20 effect a red-system-enhanced color conversion and a halftone cell is selected to perform a color conversion and tone processing (S16). After optional color correction processing has been done on the object information corresponding to an 「image」 representing a
25 「food」 - steps S18, S19, it is possible to perform printing processing.

By detecting character information in the page

description language (PDL) and making a search on a database, etc., with this character information, it is possible, in the third embodiment, to decide the attribute of a target represented by the object and, after applying a color correction to the image information in accordance with a result of decision, to form an image. Thus an image forming apparatus can be provided by which it is possible to obtain a result of better printing in accordance with the attribute such as a 「food」, an 「animal」, a 「building structure」 and 「graphics」.

Further, it may be also be possible to add estimating processing by a keyword frequency calculation and font-related calculation in the color correction processing using the estimation of the object attribute by the character information in the third embodiment. In more detail, in the flow chart shown in FIG. 7, after the search of the keyword in step S34, the counting of the frequency of the keyword involved is made in the page and the counting relating to the font involved is made. That is, in the keyword point calculation effected at the image area identifying section 203, a product of the keyword emerging frequency and keyword weight is calculated on all the object estimating keyword as a target and the total sum of such values is calculated as a result of the keyword point calculation processing. That is, the

attribute estimating keyword is registered, on a per-attribute basis, in a keyword table as shown in FIG. 8 and the weight is registered together with the keyword.

Here, the font-related calculation means a
5 calculation made on a drawing position of the keyword font in a page, kind of font and font size. And a result of calculation is quantitatively represented as a total sum and counted in as a keyword weight product. That is, the font-related calculation means the giving
10 of the weight by, as one example, performing processing such as giving a higher estimation to a font in a position as near to the object as possible, giving a higher estimation to the kind of specific font and giving a higher estimation to a larger size font.

15 In this way, one keyword is registered as the estimation elements of two or more different attributes and a highest point attribute is selected from the result of the keyword point calculation processing. By referring to the table as shown in FIG. 9 according to
20 the selected attribute, the corresponding halftone cell is selected and corresponding color conversion table is selected (S16 to S18). These processing are performed on all the objects (S19).

In this way, an image forming apparatus can be
25 provided according to which the keyword frequency count and font-related calculation are made to allow the searching processing to be made for the character

information in the PDL, the frequency calculation to be
made on the keyword and the weight calculation to be
made on the font and, in addition, the highly accurate
estimation processing is also made on the object's
5 attribute and hence the color correction is made in a
way to be matched to the objects attribute.

As set out in more detail, according to the
present invention, an image forming apparatus and
method are provided according to which it is possible
10 to obtain an optimal printing result by effecting the
color conversion and tone correction, taking the color
"area" effect more into consideration, and the color
conversion and color correction in accordance with the
object's attribute decided by the image information.

WHAT IS CLAIMED IS:

1. An image forming apparatus comprising:

an identifying section configured to analyze image
information and identify object information and to
5 detect the size of the object information and a
concentration difference between the object information
and background information;

an image processing section configured to, based
on at least one of the size of the object information
10 detected by the identifying section and the
concentration difference relative to the background
information, perform image processing on the image
information; and

a printer section configured to form an image on a
15 recording medium, based on the image information which
image processing is performed by the image processing
section.

2. An image forming apparatus according to
claim 1, wherein the image processing section has a
20 tone processing section configured to determine
halftone control information based on at least one of
the size of the object information and concentration
difference relative to the background information
detected by the image identifying section and, by doing
25 so, perform tone processing on the image information.

3. An image forming apparatus according to
claim 1, wherein the image processing section has

a color conversion section configured to determine color conversion table information based on at least one of the size of the object information and background information detected by the identifying section and, by doing so, perform color conversion processing to the image information.

4. An image forming apparatus according to claim 1, wherein the image identifying section also detects a distance relative to another object information which is the background information and the image processing section determines at least one of halftone control information and color conversion table information, based on the concentration difference relative to the background information and distance relative to said another object information and, based on this, performs image processing on the image information.

5. An image forming apparatus according to claim 1, wherein the image processing section determines, in a decreasing size order of object information detected by the identifying section, at least one of halftone control information and color conversion table information relating to a plurality of the object information and performs image processing on the image information based on at least one of the determined halftone control information and color conversion table information.

6. An image forming apparatus comprising:

an identifying section configured to analyze image information and identify object information and, in addition, detect character information from the image information;

a deciding section configured to decide an attribute of an object represented by the object information by performing searching processing, on a database, for the character information detected by the identifying section;

an image processing section configured to perform image processing on the image based on the attribute of the object represented by the object information decided by the deciding section; and

a printer section configured to form an image on a recording medium based on the image information on which the image processing is performed.

7. An image forming apparatus according to claim 1, wherein the image processing section has a tone processing section configured to decide halftone control information based on the attribute of the object represented by the object information decided by the deciding section and, by doing so, perform tone processing on the image information.

8. An image forming apparatus according to claim 1, wherein the image processing section has a color conversion section configured to determine color

conversion table information based on the attribute of an object represented by the object information decided by the deciding section and, by doing so, perform color conversion processing on the image information.

5 9. An image forming apparatus according to claim 1, wherein the image processing section performs image processing on the image information based on the attribute of the object represented by the object
10 information in a way to give consideration to a positional relation between the object information identified by the identifying section and the character information detected from the image information.

 10. An image forming apparatus according to claim 1, wherein the image processing section performs
15 image processing on the image information based on the attribute of an object represented by the object information in a way to give consideration to the size of a font of the character information detect from the character information.

ABSTRACT OF THE DISCLOSURE

An image forming apparatus comprises an identifying section configured to analyze image information and identify object information and detect
5 the size of the object information and a concentration difference between the object information and the background information, an image processing section configured to perform image processing based on at least one of the size of the object information and a
10 concentration difference relative to the background information, and a printer section configured to form an image based on image information on which the image processing is performed. By doing so, it is possible to effect proper image correction while giving
15 consideration to a color "area" effect.

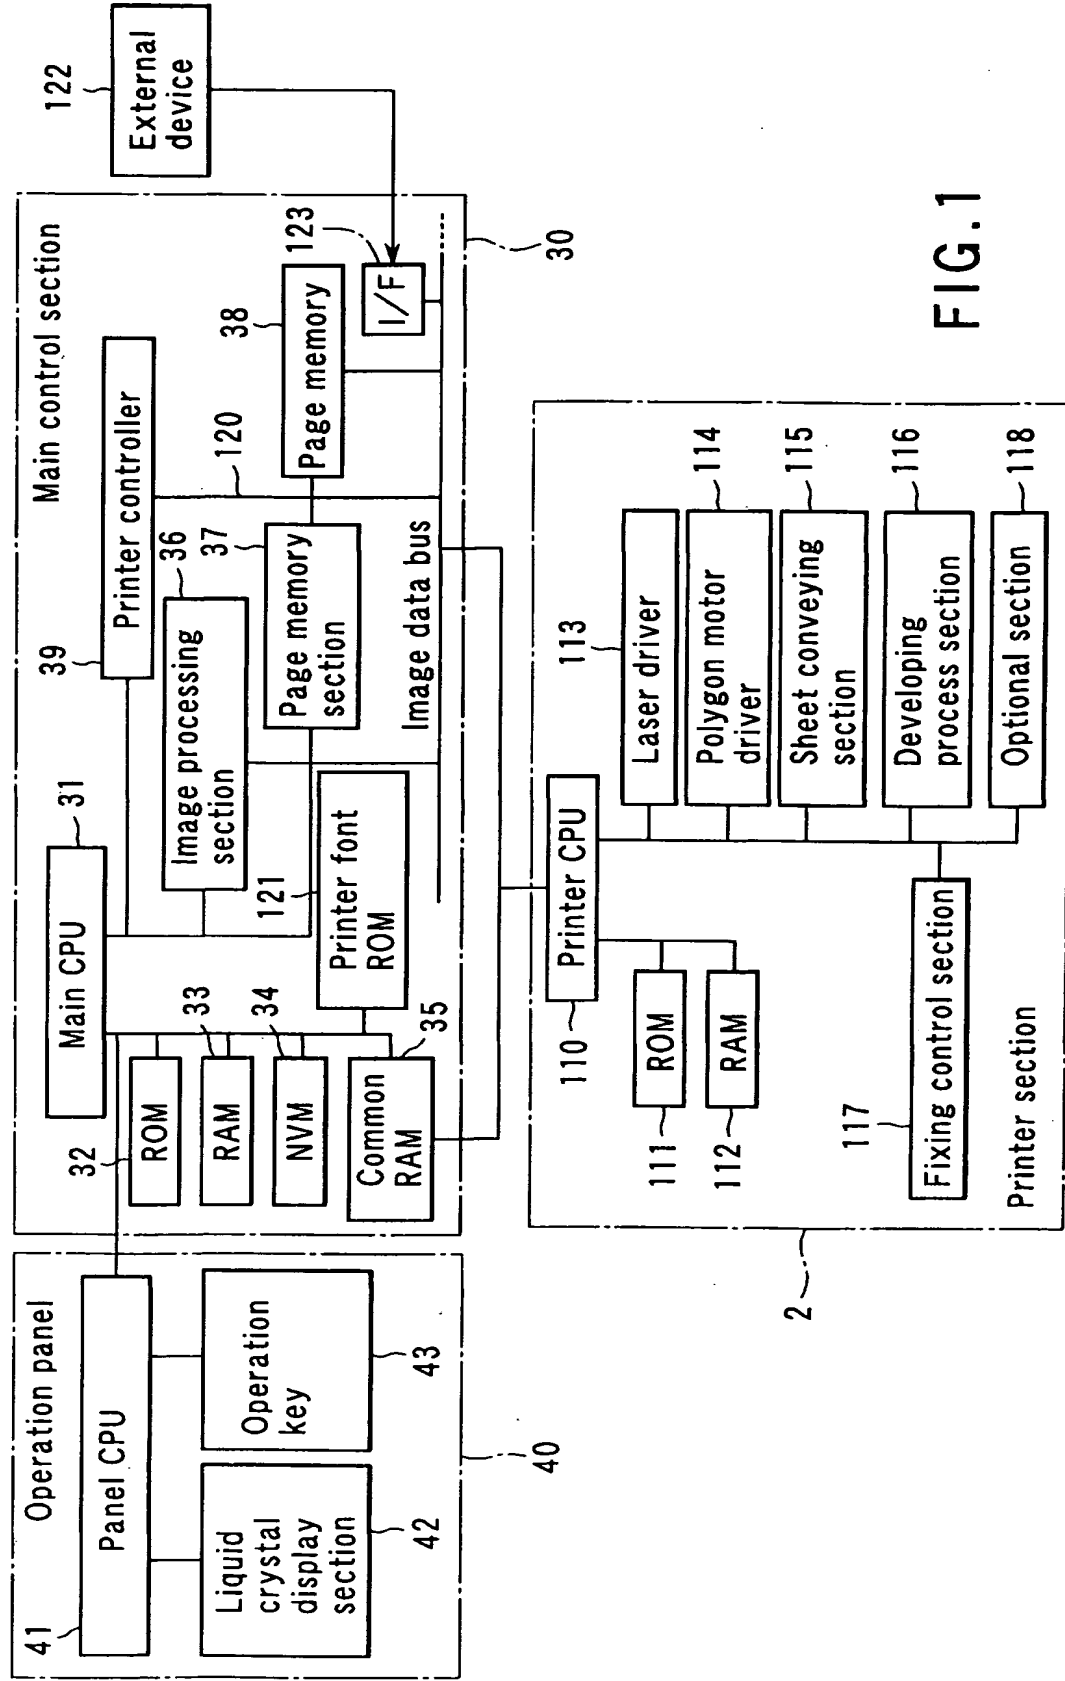


FIG. 1

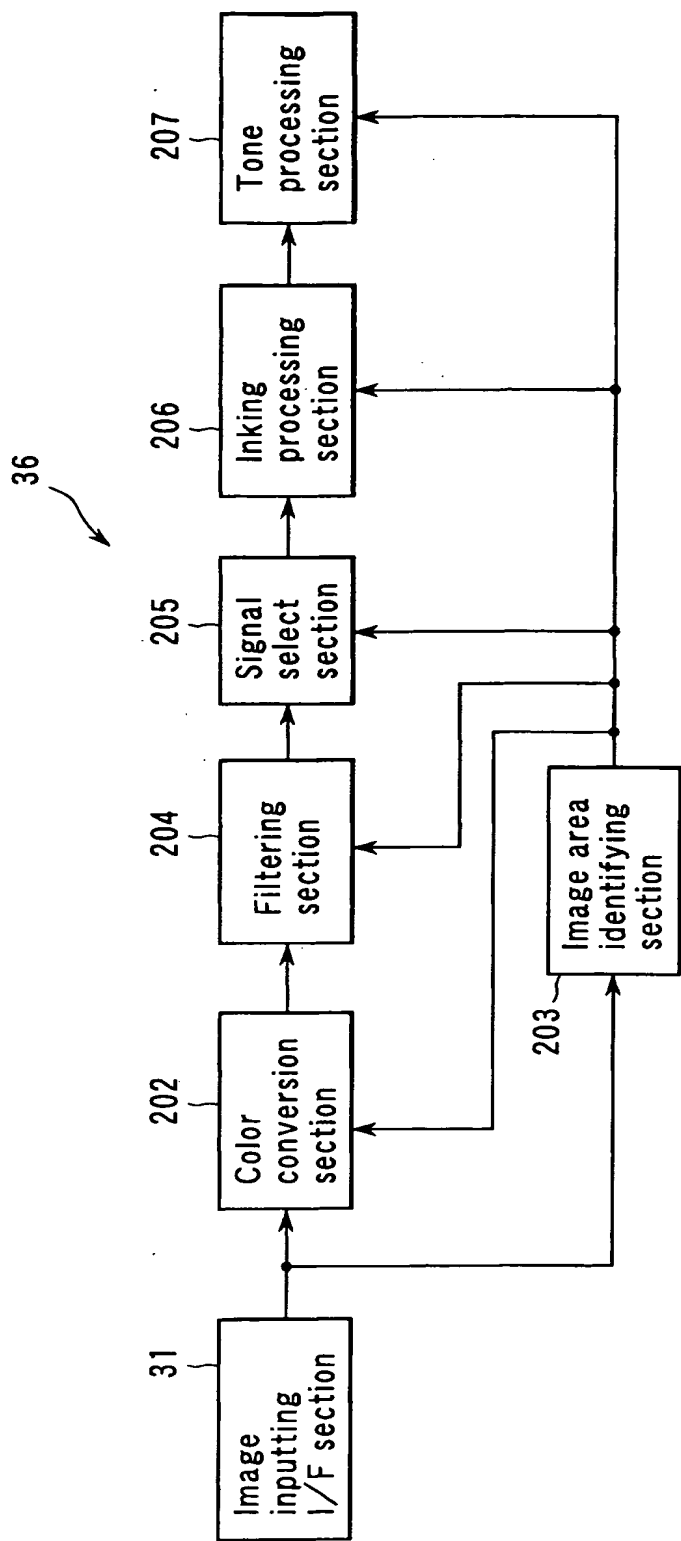


FIG.2

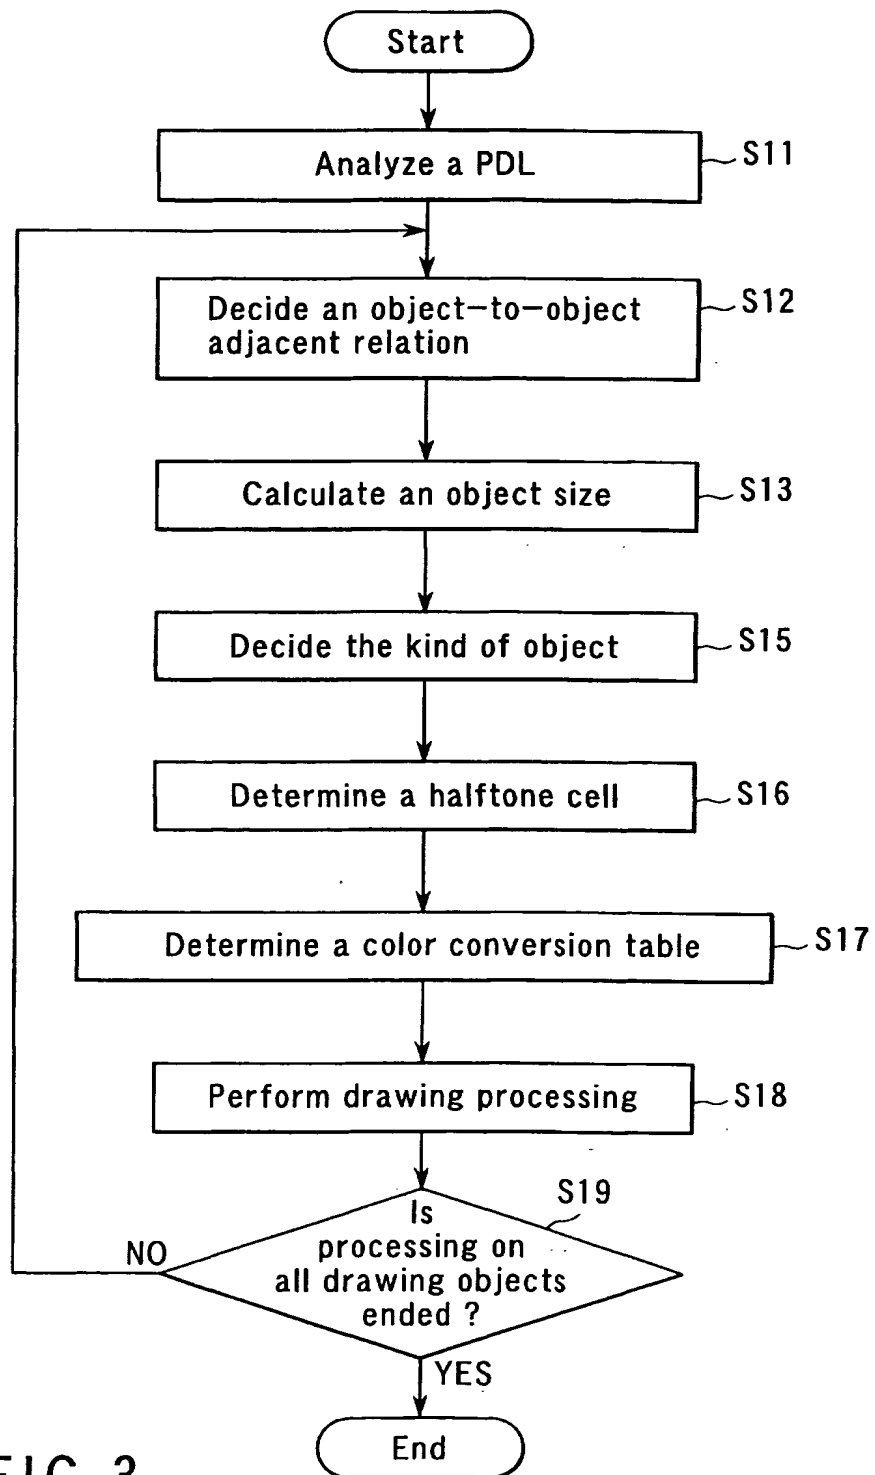


FIG.3

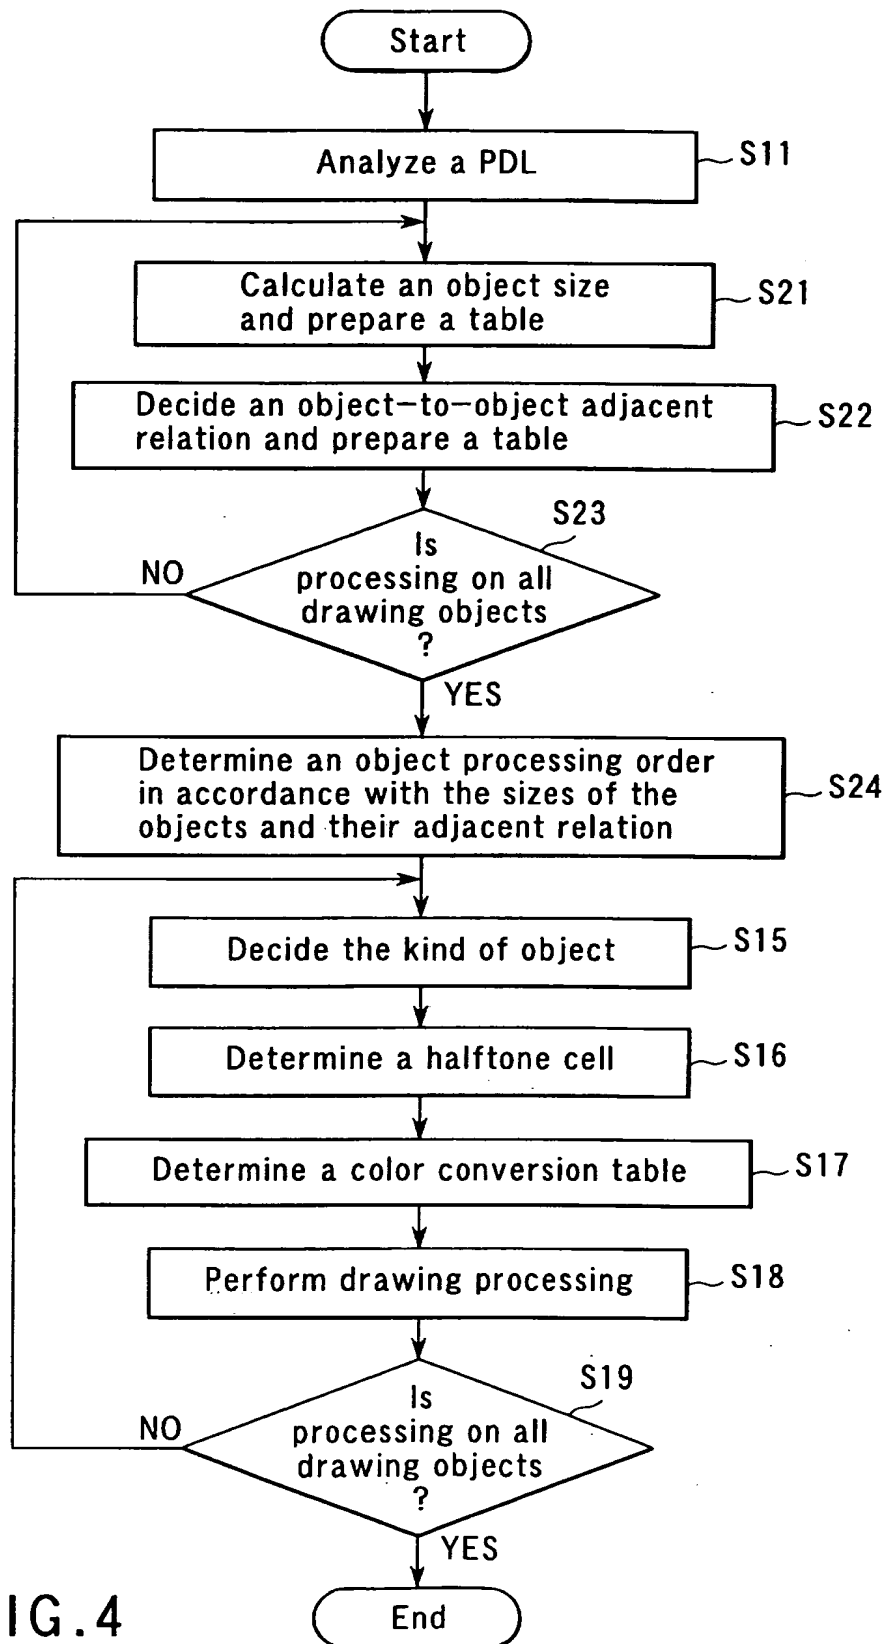


FIG. 4

Drawing order	Object number	Size(pixel)	Adjacent object
1	(4)	2400	(3),(5)
2	(5)	1200	(3),(4)
3	(3)	400	(4),(5)
4	(2)	100	None
5	(1)	80	None
...

FIG.5

Select condition			Drawing parameter	
Drawing object		Adjacent object		
Kind	Size(pixel)	Halftone cell	Color conversion table	Halftone cell
Text	Pixel number > 1000	Halftone cell A	Color conversion table A	Halftone cell A
Text	Pixel number ≤ 1000	Halftone cell B	Color conversion table B	Halftone cell B
...
Graphic	Pixel number ≤ 1000	None	Color conversion table B	Halftone cell B

FIG.6

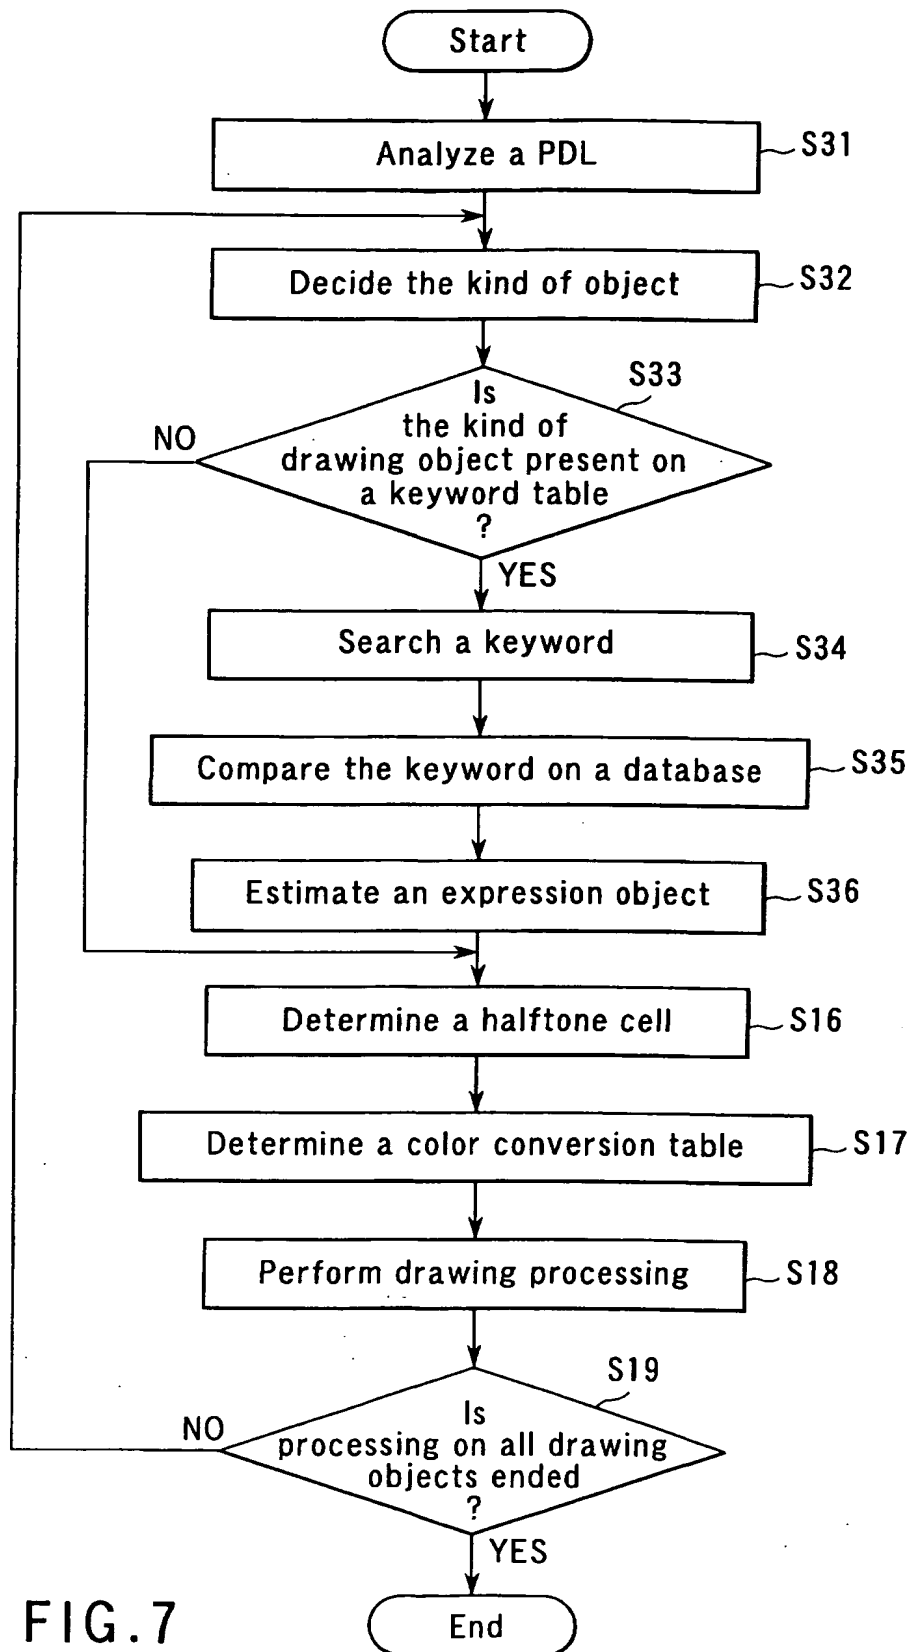


FIG. 7

Kind of object	Attribute	
Image	Food	Cake (2) Bean-jam filling bun (2) Eel (3) Mont Blane (3)
	Animal	Dog (2) Cat (2)
	Building structure	Building (3) Tower (1)
Graphics	Pie-chart	Pie-chart (2)

FIG.8

Select condition		Drawing parameter	
Drawing object			
Kind	Expression object	Color conversion table	Halftone cell
Image	Food	Color conversion table A	Halftone cell A
Image	Animal	Color conversion table B	Halftone cell B
Image	Building structure	Color conversion table C	Halftone cell C
Graphics	Pie-chart	Color conversion table D	Halftone cell D

FIG.9